


ZOOMLION



TRUCK MIXER CONCRETE PUMP 32X-4Z-9

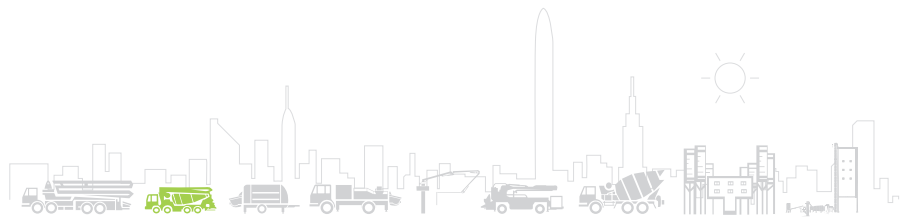






Note: Standard version. Dimensions and weights depend on truck, pump model and equipment.
Dimensions in mm. Example based on Mercedes-Benz Arocs 5 4143 8x4.
For illustration only. Actual products may vary.

Technical Specifications

BOOM		UNIT
Reach height	m	31.47
Horizontal reach	m	27.02
Reach depth	m	19.15
Unfolding height	m	7.5
Sections	/	4
Folding system	/	Z
End hose length	m	3
Delivery line	mm	DN100
PUMP		
Max. output	m ³ /h	82
Max. pressure	bar	85
Hopper capacity	L	350
Delivery cylinder	mm	200
Stroke	mm	1000
Truck mixer		
Nominal capacity	m ³	9
Drum geometric volume	m ³	15.05
Max. drum speed	rpm	14
Others		
Water tank	L	500

*All data are maximum theoretical values.

Reach information diagram, support

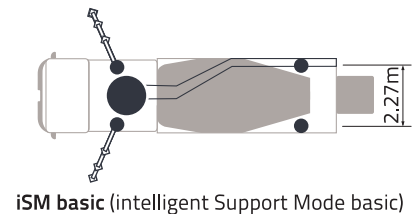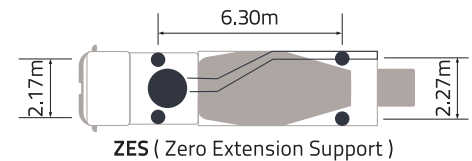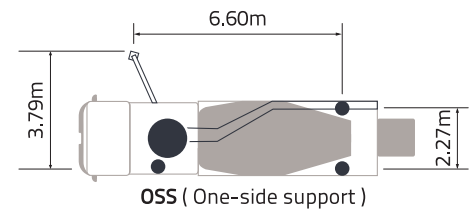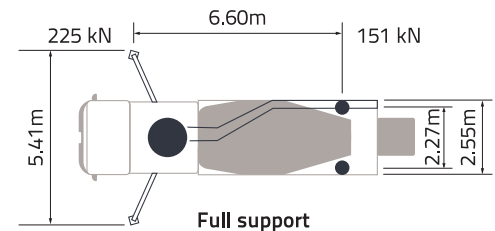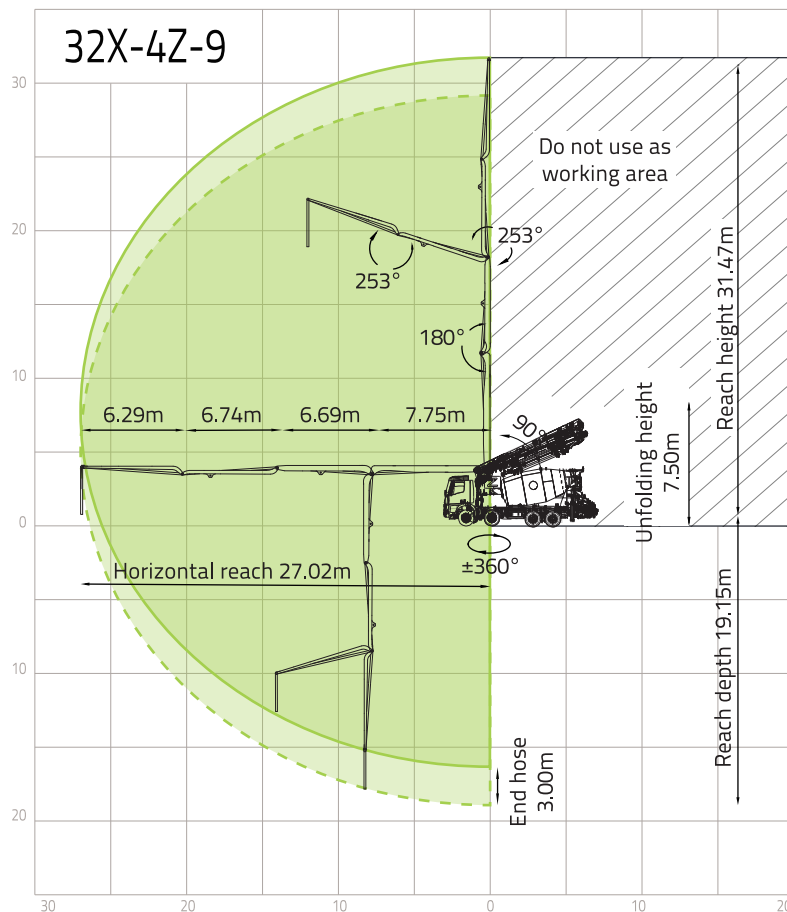

Configurations (Optional★)

Pumping System

APC (Accurate Pumping Control)
CPC (Condition-adaptive Pumping Control)
ECO (Eco. Pumping)
S-valve swinging speed control
Synchronized dual-concrete piston retraction
Chrome-plated concrete cylinder
Wear-resistant S pipe
Carbide wear plate

Placing Boom

ABC (Active Boom Control)
ARC (Active Boom Rotation Control)
iMMC (intelligent Multi-arm Motion Control)
OBF (One-joystick Boom Fold/Unfold)★
OBP (One-joystick Boom Place)★

Mixing System

In-cab mixing control
Rear panel mixing control
Radio remote mixing control
Automatic forward/reverse agitator rotation
Extension chutes *2
Main chute adjusted by electro-hydraulic power
Discharge hopper (screwable)
Discharging and pumping collaboration★
Steel hinged extension chute★

Hopper

Cleaning ball stopper

Bar-type grille
Hopper vibrator
Double door hopper cover, aluminium alloy
Hopper maintenance step

Delivery Line

End hose, 3m, DN 100
Snap pipe coupling
Single-layer straight pipe (DN100)
Double-layer bent pipe (DN100)

Lighting

Hopper light, LED
Rear hopper light, LED
Support area spotlight, LED
Mixing discharge light, LED
Support indicator light, LED
Tipping warning light, LED
Mixing warning light, LED
Side-marker lamp, LED
Boom tip light, LED★
Boom light, LED★
Baseframe access light, LED★

Safety

Outrigger Position Auto-Verify
End hose squeeze valve, operable by remote control
Reversing camera system
360° surround camera system

Mudguard, aluminium alloy
Rear Protection
Side Protection
EPC (Emergency Pumping Control)
Empty and overflow pumping protection★
OGS (Outriggers Guidance System)★

Cleaning

Water tank, 500L
Water pump, 70L/min, 15bar
Hose reel for low pressure water pump, 10m
Quick-connect water inlet
Automatic cleaning and mixing

Operation and Maintenance

Radio remote control
Remote engine off
Remote engine start
OTA (Over-the-Air Update)
Self-diagnosis and monitoring
Spacious platform for storage
Sliding ladder
Pneumatic lubrication
Central grease lubrication system (pumping)
Central grease lubrication system (boom)
Central grease lubrication system (mixing drum, etc.)★

Digital Management

ZOOMLINK APP

ZOOMLION Heavy Industry Science & Technology Co.,Ltd.

Add: No.677, Lugu Road, Zoomlion Industry Park, Changsha, Hunan, China, 410205

Copyright © ZOOMLION 2024. All rights reserved. No part of the materials provided may be reproduced or copied in any form, or used for any purpose without prior permission from ZOOMLION.

en.zoomlion.com

