


SALIENT FEATURES

All machines come with advanced features that enhance their performance, productivity and reliability to the highest level



More Bucket Breakout Force & Backhoe Bucket Capacity



Heavy Weight Champion



Most fuel efficient backhoe in the world in its class*




The Tallest Dumping Backhoe Loader in the World



Optional Quick Hitch



Powder Coating : Scratch Resistant Painting



Effy power selector switch Wheel drive / backhoe



Better Weight Distribution Effy Power Drive System

EASY TO MAINTAIN AT LOW COST

An Operator friendly machine that facilitates and alerts the operator for regular maintenance.



Engine high temperature Warning Alarm



Front Opening Bonnet



Single layer Radiator/ Cooler: Easy to clean

WORLD CLASS CABIN COMFORT

Incorporated with features for the practical needs of the operator for uninterrupted fatigue free working for longer hours.




Tiltable Steering



Forward Reverse Switch



A/C Option



Joystick with Selector Switch



HYTEC

Hytec Baumaschinen GmbH
Wölzower Weg 27, 19243 Wittenburg
+49 (0) 4171 66 911 00
info@hytec-baumaschinen.de
www.hytec-baumaschinen.de

www.hytec-baumaschinen.de

WORLD'S MOST EFFICIENT BACKHOE



HYTEC

FM100 BACKHOE 4WD



THE TRUE ALL ROUNDER

www.hytec-baumaschinen.de




FM100

ENGINE	PERKINS 1104D-44TA, EU NRMM 97/68/ EC EURO III A Diesel Engine (4400CC) Gross Power: 74.5 kW (100HP) at 2200 RPM Gross Torque: 410Nm@1400 RPM		
TRANSMISSION	ZF / CARRARO SPS Power Shift Transmission with integral torque converter		
STEERING	Power Steering		
ELECTRICALS	12V Battery System (180Ah)		
TYRES	FRONT 4WD- 12.5/80X18 - 12PR REAR Industrial (Standard) : 16.9X28 - 12PR Optional : 19.5LX24 - 12PR Heavy Duty : 14X25 - 20PR		
SPEED	Forward Max : 38.3 Km/Hr (CARRARO SPS) Reverse Max : 20.3 Km/Hr (CARRARO SPS) (3 rd Gear Recommended) Forward Max : 37 Km/Hr (ZF) Reverse Max : 22 Km/Hr (3 rd Gear Recommended)		
HYDRAULICS	Hydraulics : 3480 p.s.i (240 bar) Pump flow : 145 LPM @ 2200 RPM : 157 LPM @ high RPM Pump Type : GEAR PUMP		
WEIGHT	8200 Kgs with Standard GP Bucket option		
SERVICE CAPACITIES		System	Service
	Hydraulic Tank	120 Ltr	100 Ltr
	Fuel Tank	115 Ltr	115 Ltr
	Engine Coolant	17 Ltr	15 Ltr
	Engine Oil	13 Ltr	13 Ltr
	Transmission	19.5Ltr	13 Ltr
	Rear Axle	17 Ltr	17 Ltr
	4WD Front Axle	10 Ltr	10 Ltr



MULTIPLE LOADER BUCKET OPTIONS

DIMENSIONS

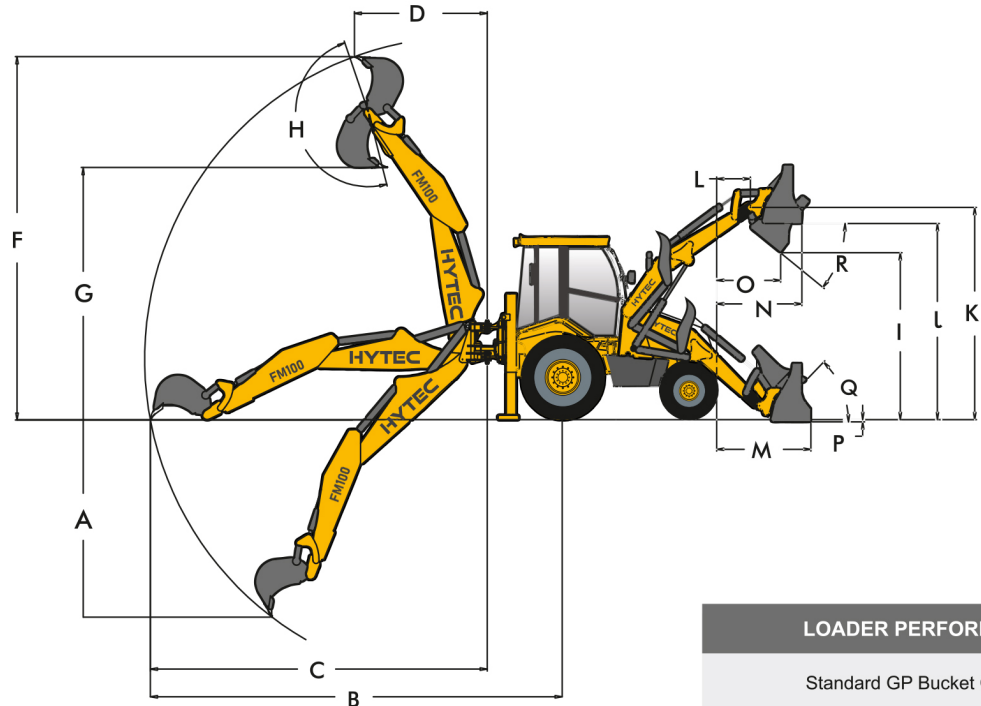

EXCAVATOR PERFORMANCE		FM100
	Standard GP Bucket Capacity	0.27 cu.m
A	Maximum DIG depth	5.60 m
B	Reach Ground Level to Rear wheel center	7.91 m
C	Reach at Ground level to slew center	6.60 m
D	Reach at full height to slew center	3.56 m
F	Maximum working height	6.77 m
G	Maximum Load over Height	5.02 m
H	Bucket Rotation power	188°
	Bucket Tear out force	6851 Kgf
	Dipper Tear out force	3316 Kgf
	Lift Capacity to bucket pivot at full reach (without bucket fitted)	1400 Kgs

LOADER PERFORMANCE		FM100
	Standard GP Bucket Capacity	1.26 cu.m
I	Dump Height	2.96 m
J	Load Over Height	3.39 m
K	Pin Height	3.61 m
L	Pin Forward Reach	0.42 m
M	Reach at Ground	1.60 m
N	Reach at full height	1.42 m
O	Reach at full Height bkt Dumping	1.1 m
P	Below ground level DIG Depth	0.08 m
Q	Roll back at Ground	50°
R	Dump Angle	45°
	Bucket Break-out Force	8793 Kgf
	Loader Arm Break-out Force	5642 Kgf
	Pay Load	2000 Kgf
	Lifting capacity at loader arm hook pin	2600 kgf

WORLD'S BEST COMPONENTS



100 HP Perkins Motor



Carraro (Italy) Transmission
& ZF (German) Transmission



Carlisle Brake
(U.S.A)



World Famous
Hydro Control / Walvoil
(Italy) Valve



AKG (German)
Radiator Cooler



Casappa (Italy) pump



Carraro (Italy) Axle